


Șurubi Cu Bile ATM

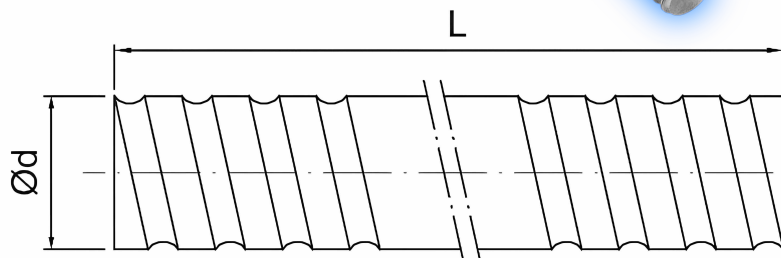

TIP ATM	Lungime max. Max length L (mm)	d (mm)	Pas Lead (mm)	Da - bile ø Da - ball ø (mm)	Clasa de precizie Accuracy grade	Sensul filetului Threading direction J=dreapta; B=stânga; R=right; L=left	Începuturi Starts	Tip piuliță Nut type
16x05	4000	16	5	3,175	C7	J R	1	SFU / DFU
16x10		16	10			J R	2	
20x05		20	5			J R	1	
20x10		20	10			J R	2	
25x05		25	5			J R	1	
25x10		25	10			J R	1	

Table1 Lead Angle Accuracy (Permissible Value)

Unit: μm

		Precision Ball Screw										Rolled Ball Screw		
Accuracy grades		C0		C1		C2		C3		C5		C7	C8	C10
Effective thread length	Above Or less	Representative travel distance error		Fluctuation		Representative travel distance error		Fluctuation		Representative travel distance error		Travel distance error	Travel distance error	Travel distance error
		Fluctuation	Fluctuation	Fluctuation	Fluctuation	Fluctuation	Fluctuation	Fluctuation	Fluctuation	Fluctuation	Fluctuation			
—	100	3	3	3.5	5	5	7	8	8	18	18	±50/ 300mm	±100/ 300mm	±210/ 300mm
100	200	3.5	3	4.5	5	7	7	10	8	20	18			
200	315	4	3.5	6	5	8	7	12	8	23	18			
315	400	5	3.5	7	5	9	7	13	10	25	20			
400	500	6	4	8	5	10	7	15	10	27	20			
500	630	6	4	9	6	11	8	16	12	30	23			
630	800	7	5	10	7	13	9	18	13	35	25			
800	1000	8	6	11	8	15	10	21	15	40	27			
1000	1250	9	6	13	9	18	11	24	16	46	30			
1250	1600	11	7	15	10	21	13	29	18	54	35			
1600	2000	—	—	18	11	25	15	35	21	65	40			
2000	2500	—	—	22	13	30	18	41	24	77	46			
2500	3150	—	—	26	15	36	21	50	29	93	54			
3150	4000	—	—	30	18	44	25	60	35	115	65			
4000	5000	—	—	—	—	52	30	72	41	140	77			
5000	6300	—	—	—	—	65	36	90	50	170	93			
6300	8000	—	—	—	—	—	—	110	60	210	115			
8000	10000	—	—	—	—	—	—	—	—	260	140			

Note) Unit of effective thread length: mm

Șurub cu bile laminat, cu filetul pe partea dreaptă

Material: Oțel



0726.175.111
0721.228.444
0754.075.656

COMPONENTE PNEUMATICE ȘI HIDRAULICE
COMPONENTE ELECTRICE
COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAȘI,
CALEA CHIȘINĂULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL:
VANZARI@AUTOMATIC.RO