

High Pressure



No Trip

Can withstand greater and stronger pressure
And not easy to trip



0726.175.111 | COMPONENTE PNEUMATICE ȘI HIDRAULICE
0721.228.444 | COMPONENTE ELECTRICE
0754.075.656 | COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAȘI,
CALEA CHIȘINĂULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO

Products Show
Easy Installation
Simple Operation



⋮
Pneumatic fittings



0726.175.111 | COMPONENTE PNEUMATICE ȘI HIDRAULICE
0721.228.444 | COMPONENTE ELECTRICE
0754.075.656 | COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAȘI,
CALEA CHIȘINĂULUI, NR. 29




WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO

SL4-M5

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA

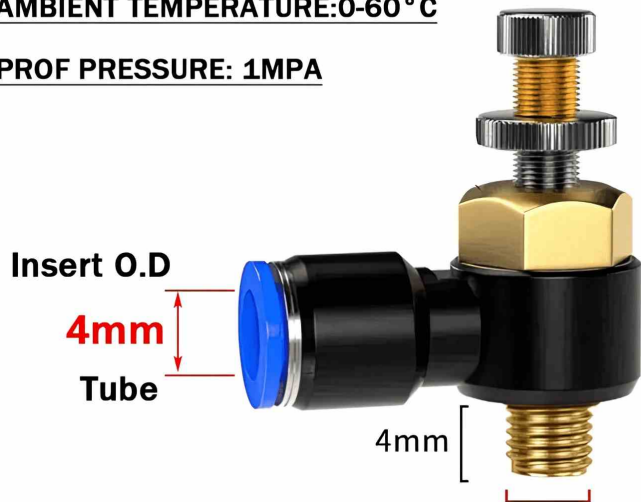


THREAD SPECIFICATION: M5*0.8 ≈ 4.9mm

SL4-01

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA

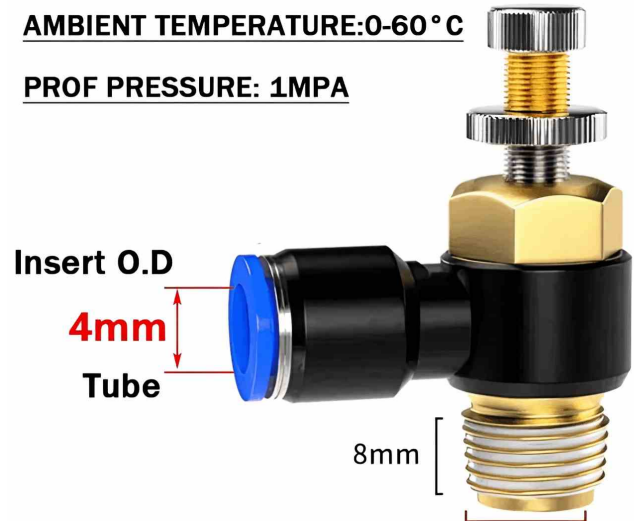

THREAD SPECIFICATION: ≈ 9.5mm

SL4-02

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA



THREAD SPECIFICATION: ≈ 12.5mm

SL6-M5

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA



THREAD SPECIFICATION: M5*0.8 ≈ 4.9mm



0726.175.111 | COMPONENTE PNEUMATICE ŞI HIDRAULICE
0721.228.444 | COMPONENTE ELECTRICE
0754.075.656 | COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAŞI,
CALEA CHIŞINĂULUI, NR. 29




WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO

SL6-01

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA

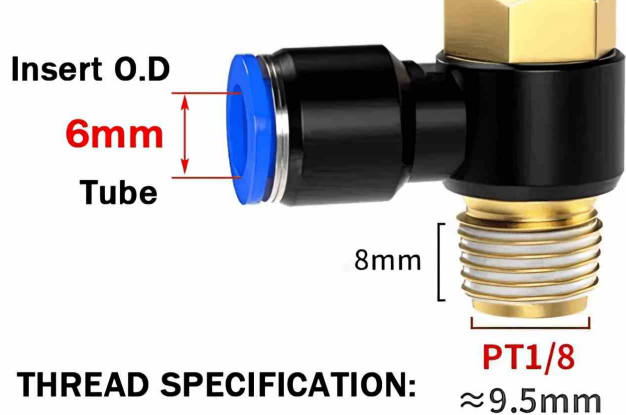

THREAD SPECIFICATION:

SL6-02

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA



THREAD SPECIFICATION:

SL6-03

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA



THREAD SPECIFICATION:

SL6-04

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA



THREAD SPECIFICATION:



0726.175.111 | COMPONENTE PNEUMATICE ȘI HIDRAULICE
0721.228.444 | COMPONENTE ELECTRICE
0754.075.656 | COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAȘI,
CALEA CHIȘINĂULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO

SL8-01

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA



THREAD SPECIFICATION: ≈ 9.5mm

SL8-02

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA




THREAD SPECIFICATION: ≈ 12.5mm

SL8-03

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA

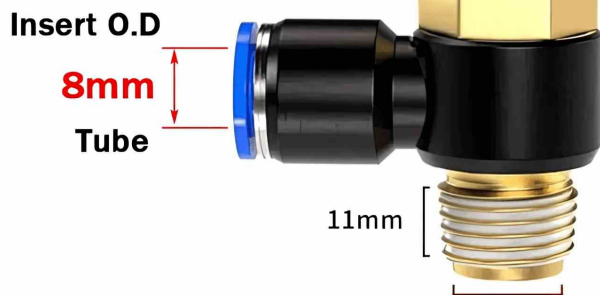

THREAD SPECIFICATION: ≈ 16mm

SL8-04

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA



THREAD SPECIFICATION: ≈ 20mm



0726.175.111 | COMPONENTE PNEUMATICE ȘI HIDRAULICE
0721.228.444 | COMPONENTE ELECTRICE
0754.075.656 | COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAȘI,
CALEA CHIȘINĂULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO

SL10-01

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA




THREAD SPECIFICATION: ≈ 9.5mm

SL10-03

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA

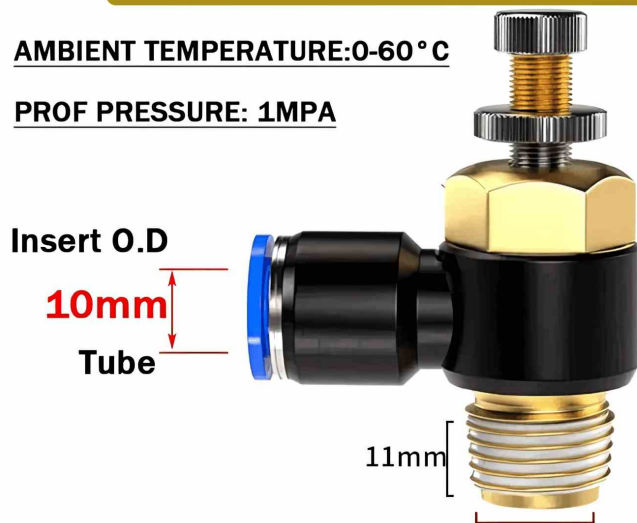


THREAD SPECIFICATION: ≈ 16mm

SL10-02

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA

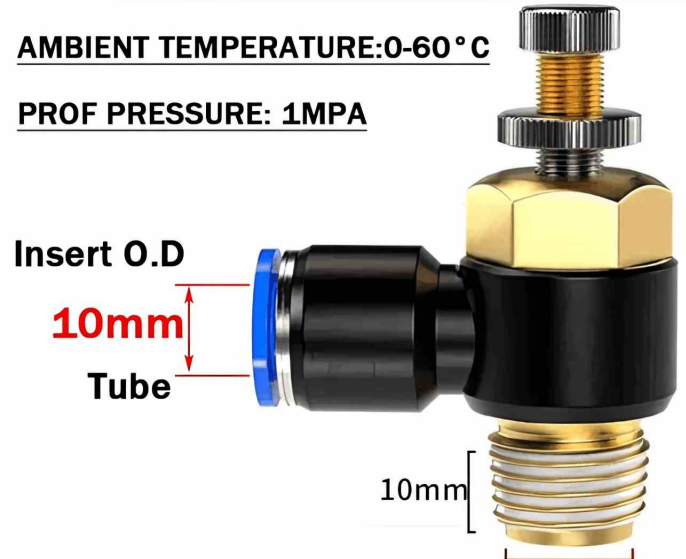


THREAD SPECIFICATION: ≈ 12.5mm

SL10-04

AMBIENT TEMPERATURE: 0-60 °C

PROF PRESSURE: 1MPA

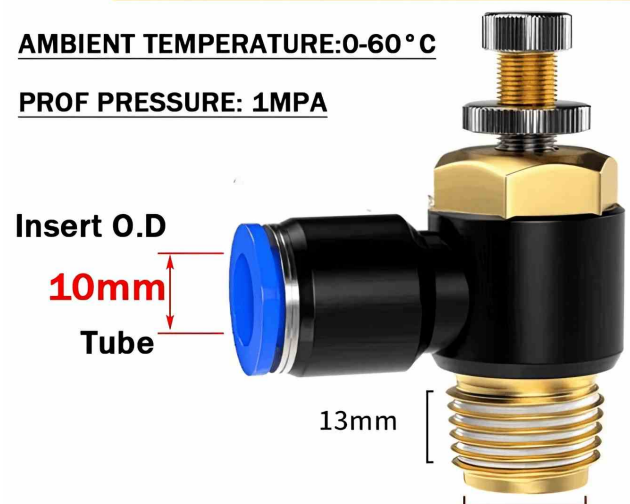

THREAD SPECIFICATION: ≈ 20mm



0726.175.111 | COMPONENTE PNEUMATICE ŞI HIDRAULICE
0721.228.444 | COMPONENTE ELECTRICE
0754.075.656 | COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAŞI,
CALEA CHIŞINĂULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO

SL12-02

AMBIENT TEMPERATURE: 0-60°C

PROF PRESSURE: 1MPA



SL12-03

AMBIENT TEMPERATURE: 0-60°C


PROF PRESSURE: 1MPA



SL12-04

AMBIENT TEMPERATURE: 0-60°C

PROF PRESSURE: 1MPA

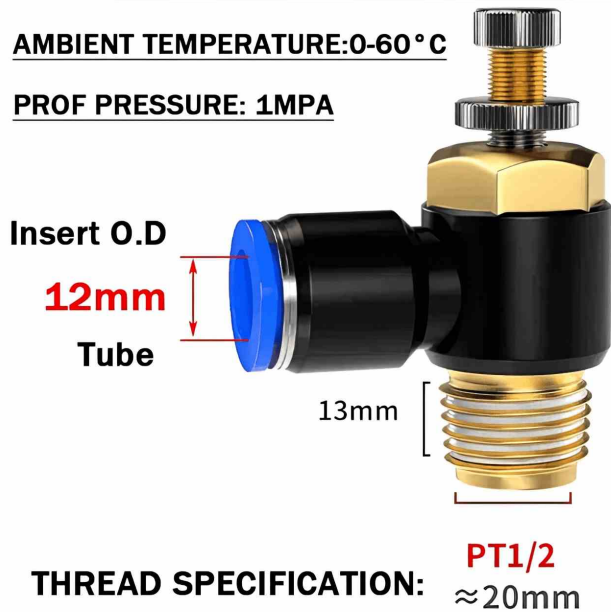

0726.175.111 | COMPONENTE PNEUMATICE ŞI HIDRAULICE
0721.228.444 | COMPONENTE ELECTRICE
0754.075.656 | COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAŞI,
CALEA CHIŞINĂULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO