



Limitator Cu Rolă L51K13MUM331

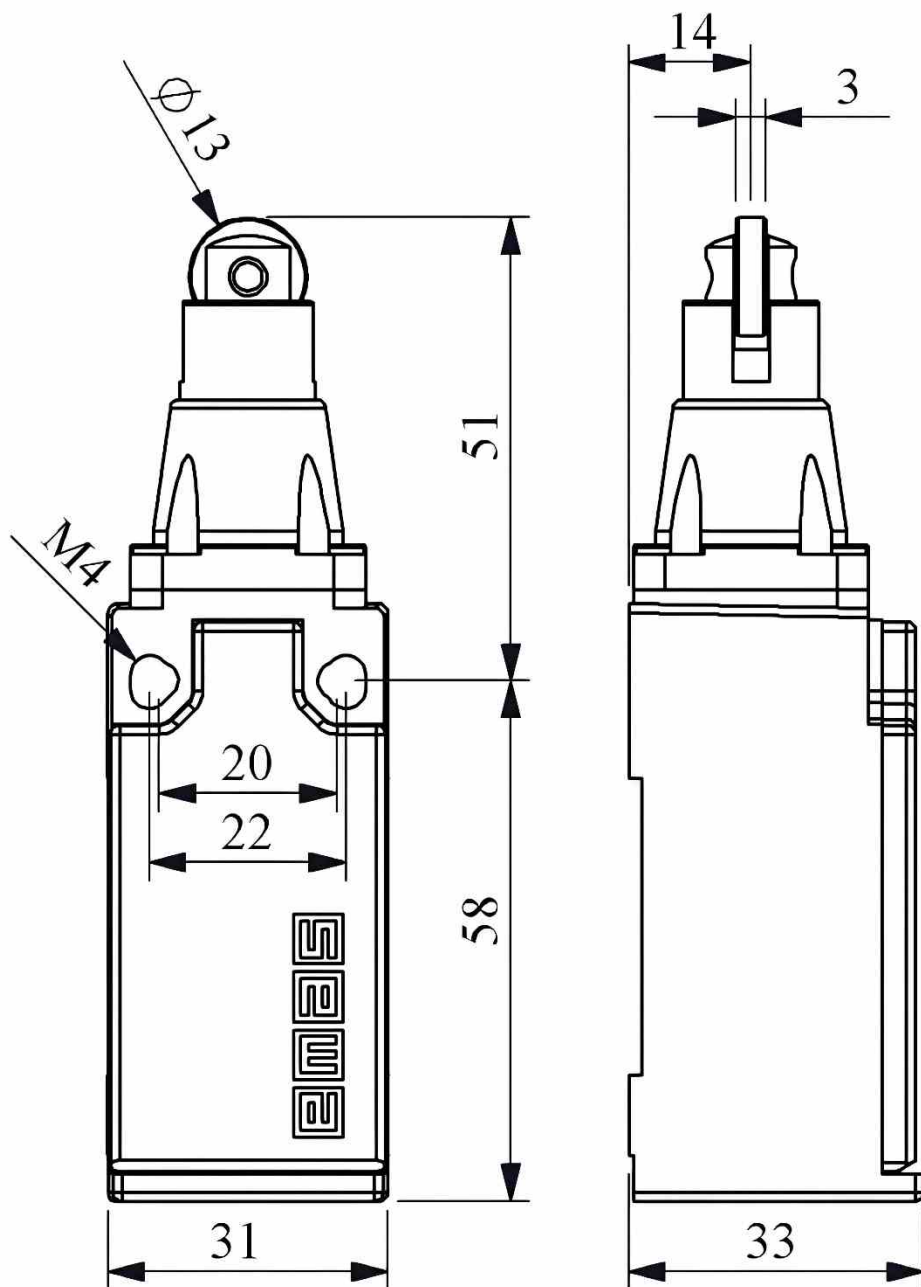

Devre Şeması

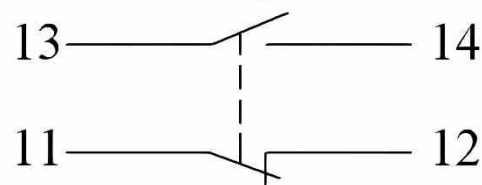

Ani Hareketli



Akış Diyagramı



0726.175.111
0721.228.444
0754.075.656

COMPONENTE PNEUMATICE ŞI HIDRAULICE
COMPONENTE ELECTRICE
COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAŞI,
CALEA CHIŞINĂULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO



L51K13MUM331

Product	Limit Switch
Contact	1NO+1NC
Actuator	Roller Plunger
Actuator Dia	13 mm
Current	I_e 3 A (240V AC)
Usage Category	AC15
Mechanical Life	Min Qty 10000000
Electrical Life	Min Qty 1000000
Operating Frequency	On-Off/Hour Mech. 3000 Elec. 1800
Insulation Voltage	U_i 300 V
Impulse Withstand Voltage	U_{imp} 2.5 kV
Dielectric Strength (Body-Contact)	1.890V AC
Dielectric Strength (Contact-Contact)	1.890V AC
Isolation Resistance	10 MΩ (500 V DC)
Operating Temperature	-25 / + 80 °C
Pollution Degree	3
Protection Degree	IP65
Contact Material	AgNi
Cable Section	1-2.5 mm ²
Screw Torque	1.5Nm
Short Circuit Breaking Capacity	I_{cs} 1 kA
Production Time	31.12.1899 00:00:00
Serial	L51 Metal Body
Contact Action	Snap Action
Actuator Material	Metal
Specifications	Metal Body and Cover 1 side PG13,5 or M20x1,5 hole Various actuator options with wide sensitive contact block alternatives for all kind of applications
Standards / Certificates	TS EN 60947-5-1 UL 508 VDE 0660



0726.175.111
0721.228.444
0754.075.656

COMPONENTE PNEUMATICE ŞI HIDRAULICE
COMPONENTE ELECTRICE
COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAŞI,
CALEA CHIŞINAULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO