


Releu Termic GTK

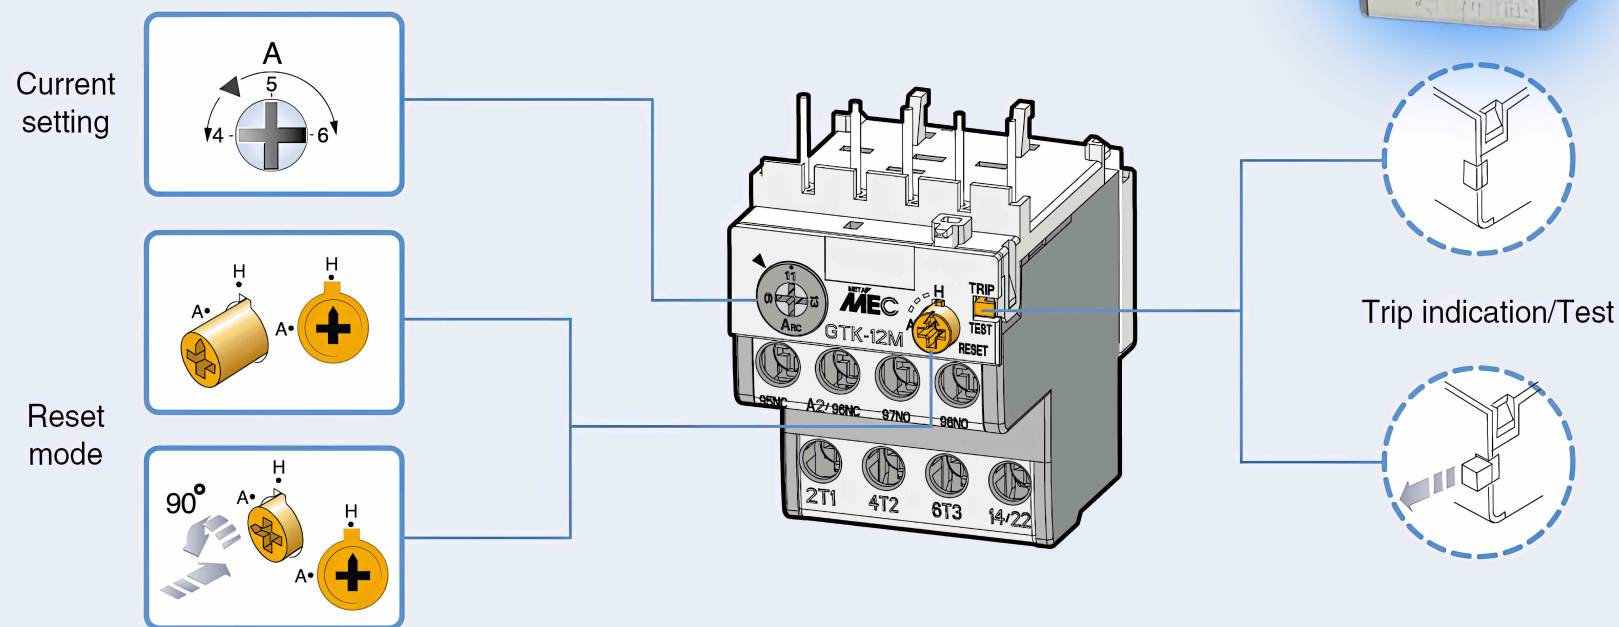

GTK-12M

Overload Relays

Bimetallic style

Type GT

Class 10A



GT-12M

Setting ranges (A)

0.1 - 0.16	4 - 6
0.16 - 0.25	5 - 8
0.25 - 0.4	6 - 9
0.4 - 0.63	7 - 10
0.63 - 1	9 - 13
1 - 1.6	12 - 16
1.6 - 2.5	
2.5 - 4	



Base for separate mount

Differential

Non-differential (3-heater)

Non-differential (2-heater)

GTK-12M

GTH-12M/3

GTH-12M

Produsator LS ELECTRIC

Tip de accesorii contactor releu termic bimetal

Contacte auxiliare incorporate NO + NC

Borne cleme cu șurub

Temperatura de funcționare -5...60°C

Clasa de protecție IP20

Greutate brută: 150 g

Gama de curent reglabil: 0.14 ~ 14A;

Pentru contactorii GMC-9, GMC-12, GMC-16;



0726.175.111
0721.228.444
0754.075.656

COMPONENTE PNEUMATICE ȘI HIDRAULICE
COMPONENTE ELECTRICE
COMPONENTE MECANICE




AUTOMATIC INVEST
ROMANIA, IAȘI,
CALEA CHIȘINĂULUI, NR. 29





WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO

AC coil contactor + Differential type overload relay


Devices combined		AC3 ratings (IEC60947-4)				Auxiliary contacts	Starter Type
Contactor (AC coil)	Overload (differential)	220 ~ 240V	380 ~ 440V	500 ~ 550V	690V		
GMC-6M	GTK-12M	1.5kW 7A	2.2kW 6A	3kW 5A	3kW 4A	1NO or 1NC	GMS-6M/K
GMC-9M	GTK-12M	2.2kW 9A	4kW 9A	3.7kW 6A	4kW 5A	1NO or 1NC	GMS-9M/K
GMC-12M	GTK-12M	3kW 12A	5.5kW 12A	4kW 7A	4kW 5A	1NO or 1NC	GMS-12M/K
GMC-16M	GTK-12M	4kW 15A	7.5kW 16A	5.5kW 9A	4kW 5A	1NO or 1NC	GMS-16M/K

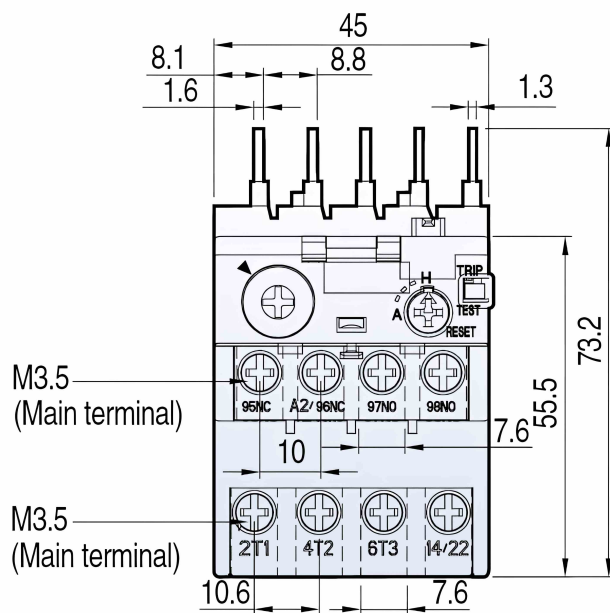

Circuit Diagram

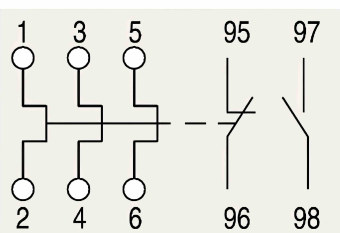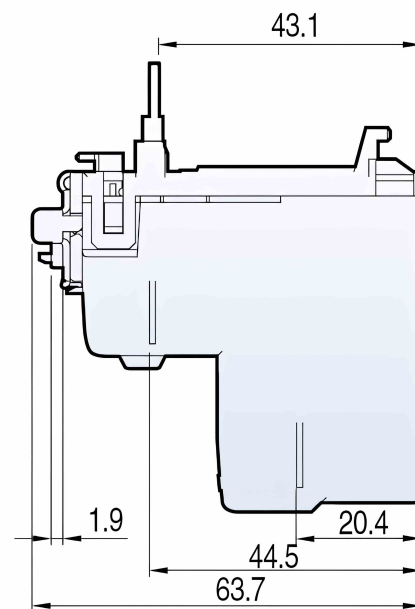

Overload Relay



Contactor + Overload Relay



0726.175.111
0721.228.444
0754.075.656
COMPONENTE PNEUMATICE ȘI HIDRAULICE
COMPONENTE ELECTRICE
COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAȘI,
CALEA CHIȘINĂULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL:
VANZARI@AUTOMATIC.RO

GTH-22

GTK-22

GTH-22/3

Overload Relays

Bimetallic style Type GT



GT-22


Setting ranges (A)	0.1 - 0.16	4 - 6
	0.16 - 0.25	5 - 8
	0.25 - 0.4	6 - 9
	0.4 - 0.63	7 - 10
	0.63 - 1	9 - 13
	1 - 1.6	12 - 16
	1.6 - 2.5	16 - 22
	2.5 - 4	



AZ-22H

*Base for
separate
mounting*

Class 10A	Differential	GTK-22
	Non-differential (3-heater)	GTH-22/3
	Non-differential (2-heater)	GTH-22
Class 20	Differential	GTK-22/L

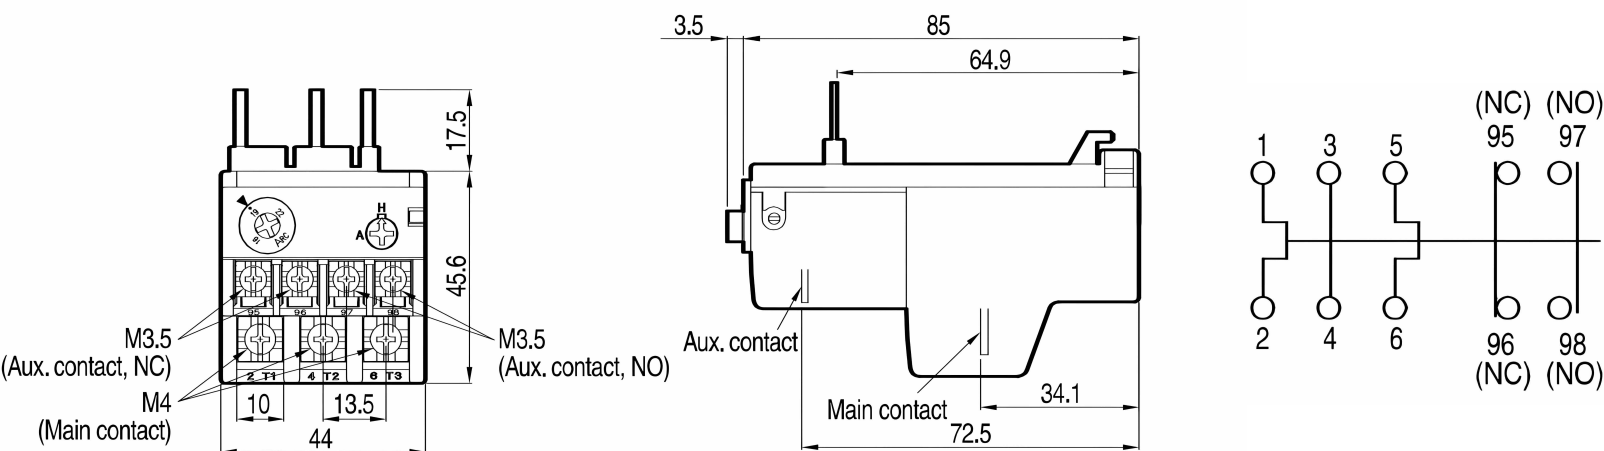

Weight: GTH-22, GTK-22 & GTH-22/3: 0.11kg (0.24 lbs.)

Releu termic cu bimetal;

Gama de curent reglabil: 0.1 - 22 A;

Pentru contactorii GM 9, 12, 18, 22;



0726.175.111
0721.228.444
0754.075.656

COMPONENTE PNEUMATICE ȘI HIDRAULICE
COMPONENTE ELECTRICE
COMPONENTE MECANICE



AUTOMATIC INVEST
ROMANIA, IAȘI,
CALEA CHIȘINĂULUI, NR. 29



WWW.AUTOMATIC.RO
EMAIL
VANZARI@AUTOMATIC.RO